

# German Hoses for Heating Ventilation and Air Conditioning

**flexAflex**



+91-99 784 42 215  
+91-90 990 16 044



flexaflexhoses@gmail.com  
flexaflex.ahd@gmail.com




+91-79 - 22 14 0461  
+91-79 - 22 16 1360



www.flexaflexhoses.com



Wall Thick. 0.4 mm  
Temp. : 90°C / 125°C  
PU Hose - Light Duty

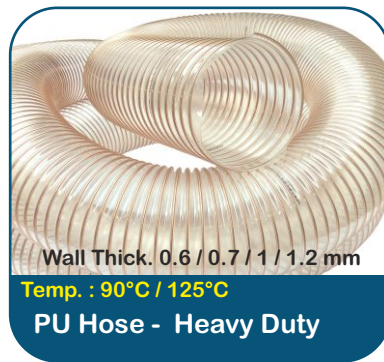

Wall Thick. 0.6 / 0.7 / 1 / 1.2 mm  
Temp. : 90°C / 125°C  
PU Hose - Heavy Duty



Temp. : 60°C  
PVC Duct Hose - Grey



Light  
Temp. : 80°C  
PVC Coated Polyester Fabric Hose - Grey



Heavy  
Temp. : 80°C  
PVC Coated Polyester Fabric Hose - Blue



Fire Retardant  
Temp. : 80°C  
PVC Coated Polyester Fabric Hose - Black



Flame Retardant  
Temp. : 80°C  
PVC Coated Polyester Fabric Hose - Yellow



Antistatic & Flame Retardant  
Temp. : 70°C  
PVC Coated Polyester Fabric Hose - White



Flame Retardant / Outer Wearstrip Profile  
Temp. : 80°C  
PVC Coated Polyester Fabric Hose - Yellow



Wall Thick. 0.5 / 0.6 & 1 mm  
Temp. : 310°C  
SILICON DOUBLE LAYER HOSE



Temp. : 135°C / 150°C  
TPR HOSE (Thermoplastic Rubber)



Temp. : 80°C  
PP Air Hose



Temp. : 100°C  
Non-Insulated Aluminium Flexible Air Ducts



Temp. : 250°C  
Non-Insulated Aluminium Flexible Air Ducts



Temp. : 150°C  
Insulated Aluminium Flexible Air Ducts



Alum + Polyester + PVC  
Temp. : 150°C  
Industrial Reinforced PVC Flexible Air Ducts



Temp. : 250°C  
Aluminium Semi-rigid Air Duct



Temp. : 70°C  
Greenline Air / Water Hose



Temp. : 400°C / 600°C  
SS Corrugated Hose



S S & M S Hose Clamp

**FLEXAFLEX HOSES INTERNATIONAL**  
106, Kailashpathi Chamber,  
Nr. Sunrise Restaurant, Reid Road,  
O/S Panchkva Gate,  
Ahmedabad - 380 002