


HIGH TEMPERATURE CLIP 1100

Temp. - 60° C to + 1100° C

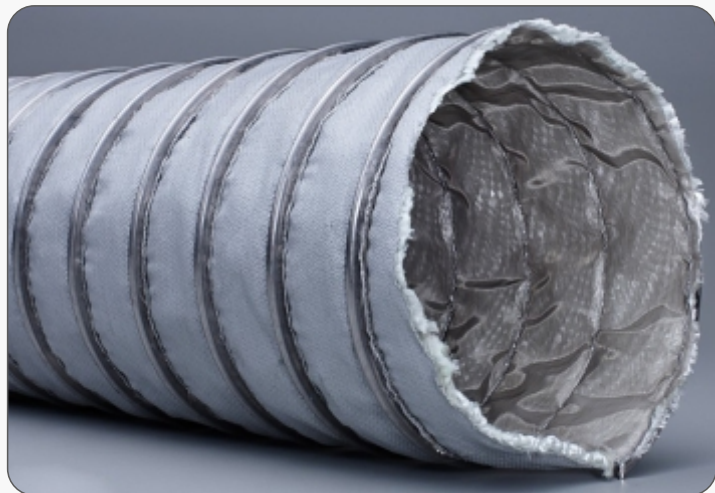

Structure:

Very flexible ducting for temperatures up to + 1100°C

Material:

3 ply, Inside: high temperature stainless steel fabric, Middle ply: high temperature isolation fabric, Outside: PU-coated high temperature fabric, reinforced by woven in stainless steel wire, silver-grey

Ø 76 to <100 - 2-hose-construction, from Ø > 100 - Standard

Properties

Good temperature resistance, outer wear strip, flame retardant, silicone free, excellent axial compressibility

Application





Spark extraction, suction of exhaust gases, flue gas extraction and suction of other hot fumes, gases or dust in all fields of industry

Temperature Resistance:



- 60° C to + 650° C

Standard Length:

3 to 10 meters
special lengths available.

|  int mm |  kg/m |  mm |  mm |  bar |
|--|--|--|--|---|
| 76 | 1.10 | 4 | 45 | 0.31 |
| 80 | 1.20 | 4 | 54 | 0.28 |
| 90 | 1.20 | 4 | 55 | 0.25 |
| 102 | 1.20 | 4 | 60 | 0.2 |
| 112 | 1.30 | 4 | 66 | 0.17 |
| 120 | 1.30 | 4 | 72 | 0.14 |
| 127 | 1.50 | 4 | 75 | 0.13 |
| 140 | 1.50 | 4 | 84 | 0.11 |
| 152 | 1.70 | 4 | 90 | 0.09 |
| 160 | 1.70 | 4 | 96 | 0.08 |
| 180 | 2.00 | 4 | 108 | 0.06 |
| 203 | 2.20 | 4 | 120 | 0.05 |
| 254 | 3.00 | 4 | 175 | 0.04 |
| 305 | 3.90 | 4 | 210 | 0.02 |
| 407 | 5.80 | 4 | 280 | 0.01 |
| 508 | 7.60 | 4 | 400 | 0.01 |
| 600 | 9.70 | 4 | 500 | 0.01 |

Pooja Shah - Sales
+91-99784 42215 | +91-70690 96458
Chirag Shah - Technical
+91-79903 36570
S.D. Shah - Director
+91-90990 16044

 flexaflexhoses@gmail.com
 www.flexaflexhoses.com
www.hosesmarket.com

FLEXAFLEX HOSES INTERNATIONAL
106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002