


HIGH TEMPERATURE CLIP HYPALON

Temp. - 40° C to + 175° C

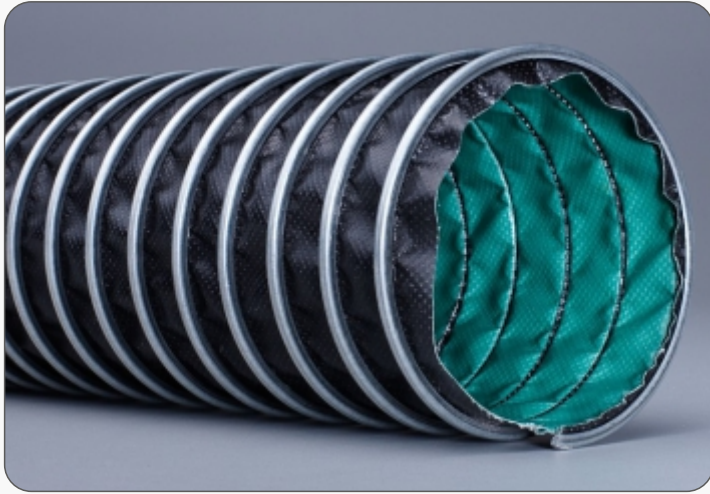

Structure:

Light weight and very flexible Hypalon® ducting

Material:

Hypalon® coated polyester fabric / external: black, internal: green

Properties

Good temperature, UV and ozone resistance, excellent chemical resistance, outer wear strip, flame retardant and excellent axial compressibility, good mechanical strength

Application

Suction of hot or cold fumes, gases or dust in all fields of industry

Temperature Resistance:







- 40° C to + 175° C

Standard Length:



3 to 10 meters

Special version:

Hypalon® T CL - 2-ply, internal: Teflon®-foil, external: Hypalon®-coated polyester tissue

					
int mm	kg/m	mm	mm	bar	bar
50	0.40	0.4	30	0.850	0.40
60	0.48	0.4	36	0.780	0.28
76	0.60	0.4	45	0.600	0.17
80	0.62	0.4	48	0.580	0.16
102	0.65	0.4	60	0.500	0.10
110	0.70	0.4	66	0.480	0.08
120	0.72	0.4	72	0.350	0.06
127	0.80	0.4	75	0.320	0.06
152	0.90	0.4	90	0.220	0.04
160	0.94	0.4	96	0.210	0.04
180	1.05	0.4	108	0.170	0.03
203	1.21	0.4	120	0.150	0.02
254	1.70	0.4	175	0.100	0.01
305	2.13	0.4	210	0.070	0.01
350	2.50	0.4	245	0.060	0.01
407	3.15	0.4	280	0.050	0.01
508	4.15	0.4	400	0.040	0.01

Pooja Shah - Sales
+91-99784 42215 | +91-70690 96458
Chirag Shah - Technical
+91-79903 36570
S.D. Shah - Director
+91-90990 16044

 flexaflexhoses@gmail.com
 www.flexaflexhoses.com
www.hosesmarket.com

FLEXAFLEX HOSES INTERNATIONAL
106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002