


HIGH TEMPERATURE CLIP PTFE

Temp. - 150° C to + 250° C

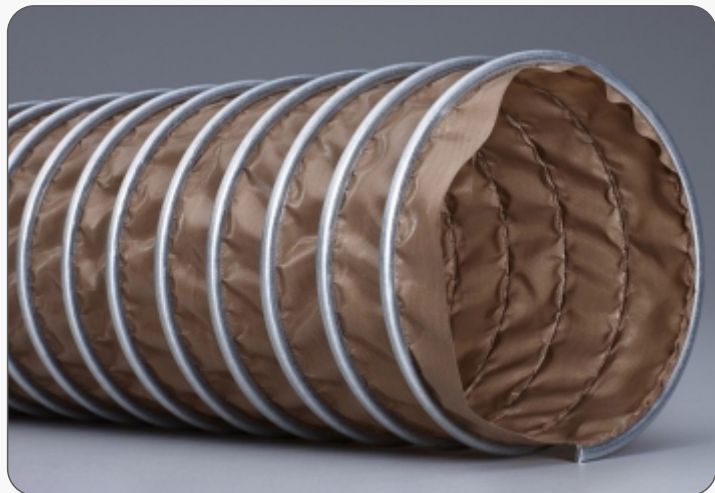

Structure:

Light weight and very flexible PTFE ducting

Material:

PTFE coated glass fabric, brown

Properties

Good temperature and chemical resistance, outer wear strip, good compressibility

Application

Suction of aggressive chemical fumes and gases in all fields of industry

Temperature Resistance:







- 150° C to + 250° C

Standard Length:



3 to 10 meters

Special construction:

PTFE® EL CL – conductive ($R < 10^6$ Ohm), conform to TRBS 2153 and ATEX guideline 94/9/EC, black

 int mm	 kg/m	 mm	 mm	 bar	 bar
50	0.40	0.12	30	0.850	0.32
60	0.50	0.12	36	0.680	0.22
76	0.60	0.12	45	0.470	0.14
80	0.63	0.12	48	0.430	0.12
102	0.65	0.12	60	0.300	0.08
110	0.70	0.12	66	0.250	0.07
120	0.72	0.12	72	0.220	0.06
127	0.80	0.12	75	0.210	0.05
152	0.90	0.12	90	0.160	0.04
160	0.94	0.12	96	0.140	0.03
180	1.05	0.12	108	0.120	0.02
203	1.21	0.12	120	0.100	0.02
254	1.70	0.12	175	0.070	0.01
305	2.13	0.12	210	0.050	0.01
350	2.30	0.12	245	0.040	0.01
407	2.90	0.12	280	0.030	0.01
508	3.90	0.12	400	0.020	0.01

Pooja Shah - Sales
+91-99784 42215 | +91-70690 96458
Chirag Shah - Technical
+91-79903 36570
S.D. Shah - Director
+91-90990 16044

 flexaflexhoses@gmail.com
 www.flexaflexhoses.com
www.hosesmarket.com

FLEXAFLEX HOSES INTERNATIONAL
106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002