


PVC FLAT DELIVERY HOSE

flexAflex

Temp. : 0°C to +60°C

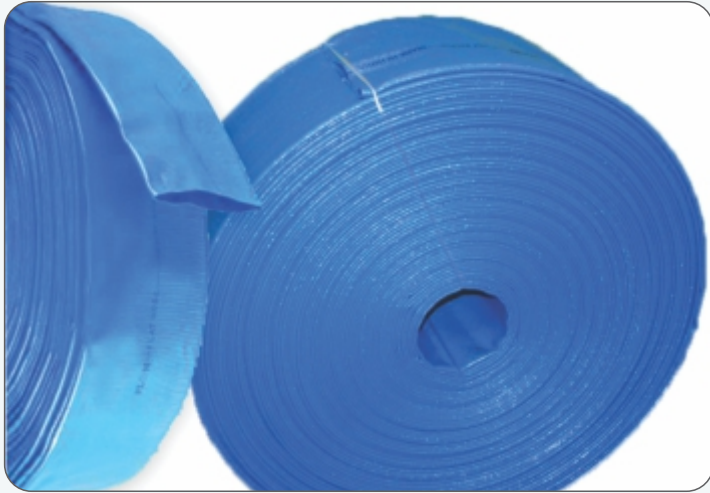

Structure:

Thick PVC coated synthetic woven fabric for better drag resistance on rough terrains keeping better working and bursting pressure.

Pressure at 30°C

Working Pressure 2 to 4 kg/cm²






Bursting Pressure 3 to 12 kg/cm²

Temperature range:

0°C to 60°C

Applications:

Delivery hose for agriculture, construction sites, flood management, mines and quarries, marine and also for handling light chemical effluent.

 int mm	 mm	 W.P Kg/cm ²	 B.P. Kg/cm ²	 Std. Len. mtr
25	1.0	6.0	18	50/60/100
40	1.0	4.0	12	50/60/100
50	1.1	4.0	12	50/60/100
65	1.2	3.5	11	50/60/100
75	1.2	3.0	10.5	50/60/100
100	1.2	3.0	9	50/60/100
150	1.8	3.0	9	50/60/100
200	2.2	3.0	7.5	50/60/100
250	2.5	3.0	7	50/60/100
300	2.6	3.0	6	50/60/100

Similar Products



Agriculture Cotton Hose

Rubber lined cotton hose for agriculture purpose.

Range:

1 1/2" to 4" ID

Pooja Shah - Sales
+91-99784 42215 | +91-70690 96458

Chirag Shah - Technical
+91-79903 36570

S.D. Shah - Director
+91-90990 16044

 flexaflexhoses@gmail.com

 www.flexaflexhoses.com
www.hosesmarket.com

FLEXAFLEX HOSES INTERNATIONAL
106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002