



Flexaflex Hoses International

THE ULTIMATE DESTINATION  
FOR INDUSTRIAL FLEXIBLE HOSES

e-mail:

flexaflexhoses@gmail.com

Web :

www.flexaflexhoses.com  
www.hosesmarket.com



**IMPORTER OF  
FLEXIBLE HOSES**

**For Auto loaders, Hopper dryers, Metallized Multilayer film plants, Extrusion, Flexographic printing machine, Rotogravure printing machine, Offset printing machine, Blow moulding, Packaging industry, PVC, HDPE, CPVC, PP Pipe manufacturing, Masterbatch industry, Speciality compounds, Food and Pharma.**

**Pooja Shah - Sales**  
+91-99784 42215  
+91-70690 96458

**Chirag Shah - Technical**  
+91-79903 36570  
**S.D. Shah - Director**  
+91-90990 16044

**FLEXAFLEX HOSES INTERNATIONAL**  
106, First Floor, Kailashpathi Chamber,  
Nr. Sunrise Restaurant, Reid Road,  
O/S Panchkuva Gate, Ahmedabad - 380 002



**PU HOSE - HEAVY DUTY**  
**Ether Grade**  
**FOOD GRADE**  
 Wall Thick.  
 0.6/ 0.8/1/1.2/1.5 mm  
 Temp. -40°C to +100°C  
 (Short-term: +125°C)



**PU HOSE - HEAVY DUTY**  
**Ether Grade**  
**NON TOXIC**  
 Wall Thick.  
 0.7/ 1 / 1.4 mm  
 Temp. -40°C to +100°C  
 (Short-term: +125°C)



**PU HOSE - EXTRA HEAVY DUTY**  
**Ether Grade**  
**FOOD GRADE / NON TOXIC**  
**Auto Loader Hose**  
 Wall Thick. 2.5 mm  
 Temp. -40°C to +100°C  
 (Short-term: +125°C)



**PVC STEEL WIRE HOSE**  
**THUNDER HOSE**  
**FOOD GRADE**  
**Auto Loader Hose**  
 Wall Thick. 3.5 to 7 mm  
 Temp. 70°C



**PVC SUCTION & DELIVERY**  
**FOOD GRADE HOSE -FLEXANT**  
**FOOD GRADE / PHTHALATE FREE /**  
**ANTISTATIC**  
**Metallized Multilayer Film Plants,**  
 Wall Thick . 3 to 6.5 mm  
 Temp. 0°C up to +60°C



**SILICON DOUBLE**  
**LAYER HOSE**  
 Wall Thick. 0.7  
 Temp. -70°C to +270°C  
 (Short time 300°C)



**SILICON DOUBLE**  
**LAYER HOSE**  
**HOT PET GRANULES**  
 Wall Thick. 1 mm  
 Temp. -70°C to +270°C  
 (Short time 300°C)



**SILICON SUCTION HOSE**  
**SUPER HEAVY**  
**HOT PET GRANULES**  
 Wall Thick. 5 mm  
 Temp. -60°C to +200°C



**THERMOPLASTIC RUBBER HOSE**  
**TPR HOSE**  
 Wall Thick. 0.65 mm  
 Temp. -40°C to +135°C  
 (Short time 150°C)




**PVC NON TOXIC SUCTION HOSE**  
**WITH ANT COPPER WIRE**  
**FOOD GRADE**  
 W. P. 3.5kg/cm<sup>2</sup> to 7kg/cm<sup>2</sup>  
 B. P. 11kg/cm<sup>2</sup> to 23kg/cm<sup>2</sup>  
 Temp. 60°C



**PVC SUCTION & DELIVERY HOSE**  
**GREEN - MEDIUM DUTY**  
**Range : 20 mm to 100 mm**  
 W. P. 3.5kg/cm<sup>2</sup> to 7kg/cm<sup>2</sup>  
 B. P. 11kg/cm<sup>2</sup> to 24kg/cm<sup>2</sup>  
 Temp. 60°C




**PVC SUCTION & DELIVERY HOSE**  
**HEAVY DUTY GREY**  
**Range : 25 mm to 300 mm**  
 W. P. 2.5kg/cm<sup>2</sup> to 8kg/cm<sup>2</sup>  
 B. P. 6kg/cm<sup>2</sup> to 25kg/cm<sup>2</sup>  
 Temp. 60°C



**PU HOSE FDA APPROVED**  
**FLEXADUX P7 L & M PU PAS FOOD**  
**FOOD GRADE - FDA APPROVED**  
**PERMANENTLY ANTISTATIC**  
**WITH SS 304 WIRE**  
 Wall Thick . 0.7/ 1.4 mm  
 Temp. -40°C to +100°C  
 (Short-term: +125°C)



**FLEXADUX HT PU**  
**POLYURETHANE HOSE FOR HIGH**  
**TEMPERATURE APPLICATIONS**  
 Wall Thick . 0.7/1/1.4 mm  
 Temp. -40°C to +145°C  
 (Short-term: +165°C)




**PU HOSE FOOD GRADE  
FLEXADUX P7 OL PU FOOD  
FOR FATTY FOOD**

Wall Thick. 0.7 / 1.4 mm  
Temp. -40°C to +100°C  
(Short-term: +125°C)



**PU HOSE - SUPER HEAVY DUTY  
ETHER GRADE  
FOOD GRADE**

Wall Thick. 4 mm  
Temp. -40°C to +100°C  
(Short-term: +125°C)

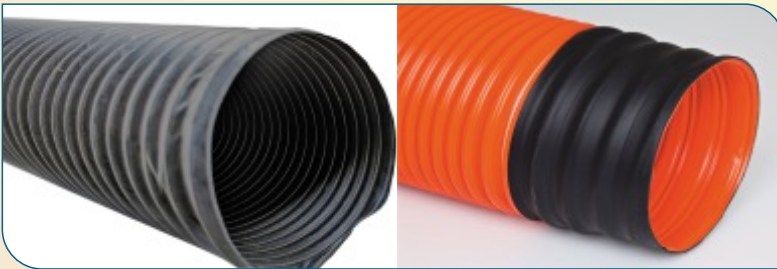

**VACUUM LIFT HOSE  
BLACK - ORANGE**


Range : 100, 120, 150, 160, 180, 200mm  
Temp: 85°C



**HIGH TEMPERATURE  
CLIP HYPALON**

Wall Thick. 0.4 mm

Temp. -40°C to 175°C



**HIGH TEMPERATURE  
CLIP SILICON**

Wall Thick. 0.4 mm

Temp. -60°C to 300°C



**POLYESTER FABRIC HOSE  
PVC COATED**

UV / Flame Resistant - Antistatic  
Grey / Blue / Yellow / White  
Wall Thick. 0.35 / 0.4 / 0.5  
Temp. -30°C to +70°C



**PU HOSE - PERMANENTLY  
ANTISTATIC AND FLAME  
RETARDANT**

Wall Thick.  
0.4/0.6/0.7/1/1.4/2mm  
Temp. -40°C to +100°C  
(Short-term: +125°C)



**PU HOSE WITH RIGID HELIX  
Serie 3PUR S - AL  
FOOD GRADE**

Wall Thick. 0.75 to 1mm  
Temp. -30°C to +80°C

POWDER CONVEYING



**PU HOSE WITH RIGID HELIX  
Serie 3PUR M - AL - ANT  
FOOD GRADE / ANTISTATIC**

Wall Thick. 0.75 to 1mm  
Temp. -30°C to +80°C

POWDER CONVEYING



**FLEXIBLE METAL HOSES  
S.S. CORRUGATED  
FLEXIBLE HOSES**

Stainless steel  
AISI 304, AISI 321 and AISI316L  
Temp. -270°C to +600°C  
EN ISO 10380

END Connection  
as per customer specifications



**PVC BRAIDED HOSES  
TRANSPARENT (HEAVY DUTY)**

Wall Thick. 2.5 to 8 mm  
Range : 6 mm to 76 mm  
W. P. 6kg/cm<sup>2</sup> to 25kg/cm<sup>2</sup>  
Temp. 70°C



**EVA PROFILE HOSE  
INDUSTRIAL VACUUM  
CLEANER HOSE  
SWIMMING POOL HOSE**

Temp. -50°C to +60°C



**VAT-ELASTIC HOSE  
VACUUM CLEANER HOSE  
WET AND DRY FLOOR CARE**

Wall Thick. 0.5 mm  
Temp. 0°C to +85°C




**PVC FLEXIBLE DUCT HOSE  
TRANSPARENT**

**Temp. 60°C**



**PVC FLEXIBLE DUCT HOSE  
GREY**

**Temp. 60°C**



**PU HOSE  
ELECTRICALLY CONDUCTIVE  
FLEXADUX P7 M PU EL**

**Wall Thick. 1.4 mm**

**Temp. -40°C to 100°C**



**PNEUMATIC TOOL HOSE**

**Range : 6.3 mm to 50 mm ID**

**W.P. 14 kg/cm<sup>2</sup>**

**Temp. -30°C to +82°C**

**I.S. 446 : 1980 Type II**



**AIR AND WATER HOSE**

**Range : 12.5 mm to 100 mm ID**

**W.P. 12 kg/cm<sup>2</sup>**

**Temp. -30°C to +82°C**

**I.S. 446 Type - I / I.S. 444 Type - II**



**HYDRAULIC HOSES  
SAE R2 AT**

**Range :6.3 mm to 50.8 mm**

**W.P. 82 to 400 kg/cm<sup>2</sup>**

**B.P. 325 to 1630 kg/cm<sup>2</sup>**

**Temp. -40°C to +100°C**




**HYDRAULIC HOSES  
SAE R1 AT**

**Range :6.3 mm to 50.8 mm**

**W.P. 40 to 230 kg/cm<sup>2</sup>**

**B.P. 163 to 920 kg/cm<sup>2</sup>**

**Temp. -40°C to +100°C**



**THERMOPLASTIC RUBBER HOSE  
WATER - HOSE**

**Range :12.5 / 20 / 25 mm**

**W.P. 10 kg/cm<sup>2</sup>**



**THERMOPLASTIC RUBBER HOSE  
AIR / PNEUMATIC**

**Range :6 mm to 50 mm**

**W.P. 14 to 22 kg/cm<sup>2</sup>**



**HIGH PRESSURE AIR  
CLEANING HOSES**

**Range :8.5 mm to 20 mm**

**W.P. 30 to 60 kg/cm<sup>2</sup>**

**B.P. 120 to 225 kg/cm<sup>2</sup>**



**PNEUMATIC TUBE  
(PU TUBE)**

**W.P. 6 to 10 kg/cm<sup>2</sup>**



**PNEUMATIC FITTINGS  
AND Standard  
Cylinder A16, A17**



M.S. HOSE CLAMP



S.S. HOSE CLAMP



S.S. / M.S. BOLT HEAVY TYPE  
& O.H.T.C. HOSE CLAMP



S.S. BRIDGE CLAMP



Hose Connector



Coupling  
Screw cuff for different hoses  
and diameters.



Screw cuff