

**POLYESTER FABRIC HOSE - PVC COATED
UV RESISTANT**

flexaflex

Temp. -20°C to 70°C



Light Duty

Structure:

PVC coated on both sides light polyester fabric hose / reinforced with medium heavy spring steel wire.

Wall Thick:

0.25 / 0.30 mm

Colour :

Grey

Temp. :

-20°C to 70°C

Compression Ratio :

10:1

Range :


50 mm to 600 mm ID

Standard Length:

10 Meter

Applications:

Conveyance of light duty air, dust, air conditioning and ventilation technology. For China Bale Plucker (Textile machinery) for screw road cover (conduit) etc.

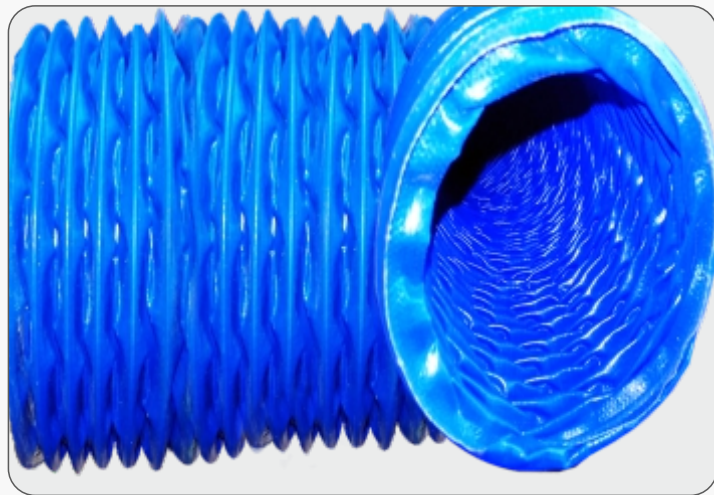

Heavy Duty

Structure:

Medium heavy polyester fabric hose - PVC coated on both sides - reinforced with heavy spring steel wire.

Wall Thick:

0.4 mm

Colour :

Blue / Black / Grey / Yellow

Temp. :

-20°C to 70°C

Compression Ratio :

10:1.5

Range :

38 mm to 1000 mm ID

Standard Length :

4 mtrs to 15 mtrs

Applications :

Heavy dust, air blowing or suction, air conditioning and ventilation technology, Tumbler dryers, printing and lamination machines, low temp. welding fume extraction, Tea dryers, industrial food processing, UV Printing, pollution control and all other industrial applications.

Pooja Shah - Sales

+91-99784 42215 | +91-70690 96458

Chirag Shah - Technical

+91-79903 36570

S.D. Shah - Director

+91-90990 16044



flexaflexhoses@gmail.com



www.flexaflexhoses.com

www.hosesmarket.com

FLEXAFLEX HOSES INTERNATIONAL

106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002

**POLYESTER FABRIC HOSE - PVC COATED
UV RESISTANT**

flexaflex

Temp. -20°C to 70°C



**Heavy Duty
Antistatic and Flame Retardant**



**Heavy Duty
Flame Retardant**

Structure:

Heavy duty polyester fabric hose - PVC coated on both side and reinforced with cotinus tough spring steel wire.

Hose in **flame retardant and antistatic** and has smooth inside outside with strength and durability

Wall Thick:

0.5 mm

Colour :

White - **Antistatic and Flame Retardant**

Yellow - **Flame Retardant**

Temp. :

-20°C to 70°C

Range :

38 mm to 1000 mm ID

Standard Length :

4 mtrs to 15 mtrs

Compression Ratio :

10 : 2

Applications :

Used for air intake or blowing. As duct hose for blowers, potable Evacuators, Fans, Fume extraction, Ventilation, Washing machine dryers, pollution control and for all other industrial applications and .

Pooja Shah - Sales
+91-99784 42215 | +91-70690 96458

Chirag Shah - Technical
+91-79903 36570

S.D. Shah - Director
+91-90990 16044



flexaflexhoses@gmail.com



www.flexaflexhoses.com
www.hosesmarket.com

FLEXAFLEX HOSES INTERNATIONAL
106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002