

flexAflex

Flexaflex Hoses International

**THE ULTIMATE DESTINATION
FOR INDUSTRIAL FLEXIBLE HOSES**

IMPORTER OF FLEXIBLE HOSES

For Auto loaders, Dryers, Flexographic Printing, Rotogravure Printing, Offset Printing, UV offset Printing, Lamination, Coating, Multilayer and Metallized Film plants, Laser Printing, Laser & Plasma Cutting industries, Blow moulding, Extrusion and Packaging Industries.



CONTACT

Pooja Shah - Sales
+91-99784 42215
+91-70690 96458

e-mail:
flexaflexhoses@gmail.com

Chirag Shah - Technical
+91-79903 36570
S.D. Shah - Director
+91-90990 16044

Web :
www.flexaflexhoses.com
www.hosesmarket.com

FLEXAFLEX HOSES INTERNATIONAL

106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002




SILICON DOUBLE LAYER HOSE

Wall Thick. 0.7 / 1 mm
Temp. -70°C to +270°C
(Short time 300°C)



**THERMOPLASTIC RUBBER HOSE
TPR HOSE**

Wall Thick. 0.65 mm
Temp. -40°C to +135°C
(Short time 150°C)



**PU HOSE - LIGHT DUTY
Ether Grade**

Wall Thick. 0.4 mm
Temp. -40°C to +100°C
(Short-term: +125°C)



**PU HOSE - HEAVY DUTY
Ether Grade**

Wall Thick.
0.6/ 0.8/1/1.2/1.5 / 2.5 mm
Temp. -40°C to +100°C
(Short-term: +125°C)



**FLEXADUX HT PU
POLYURETHANE HOSE FOR HIGH
TEMPERATURE APPLICATIONS**

Wall Thick . 0.7/1/1.4 mm
Temp. -40°C to +145°C
(Short-term: +165°C)



**PVC STEEL WIRE HOSE
THUNDER HOSE
FOOD GRADE**

Auto Loader Hose
Wall Thick. 3.5 to 7 mm
Temp. 70°C



**PVC SUCTION & DELIVERY
FOOD GRADE HOSE -FLEXANT
FOOD GRADE / PHTHALATE FREE /
ANTISTATIC
Metallized Multilayer Film Plants,**

Wall Thick . 3 to 6.5 mm
Temp. 0°C up to +60°C



**POLYESTER FABRIC HOSE
PVC COATED
UV / Flame Resistant - Antistatic**

Grey / Blue / Yellow / White
Wall Thick. 0.35 / 0.4 / 0.5
Temp. -30°C to +70°C



**PVC FLEXIBLE DUCT HOSE
TRANSPARENT**

Temp. 60°C



**PVC FLEXIBLE DUCT HOSE
GREY**

Temp. 60°C



**POLYESTER FABRIC HOSE
PVC COATED
FIRE RETARDANT
BLACK**

Range: 50 mm to 600 mm
Wall Thick.: 0.25 / 0.3
Temp. -20°C to 70°C



**ALUMINIUM COMBI HOSE
SEMI INSULATED ALUMINIUM
FOIL HOSE**

Temp.100°C



**ALUMINIUM FOIL HOSE
LIGHT / HEAVY Types**

Temp. 100°C & 250°C



**ALUMINIUM FOIL HOSE
WITH INSULATION**

Temp. 150°C



FLEXIBLE METAL HOSES
S.S. CORRUGATED
FLEXIBLE HOSES
 Stainless steel
 AISI 304, AISI 321 and AISI316L
Temp. -270°C to +600°C
EN ISO 10380

END Connection
 as per customer specifications




PVC BRAIDED HOSES
TRANSPARENT (HEAVY DUTY)
Wall Thick. 2.5 to 8 mm
Range : 6 mm to 76 mm
W. P. 6kg/cm² to 25kg/cm²
Temp. 70° C



EVA PROFILE HOSE
INDUSTRIAL VACUUM
CLEANER HOSE
SWIMMING POOL HOSE
Temp. -50°C to +60°C




VAT-ELASTIC HOSE
VACUUM CLEANER HOSE
WET AND DRY FLOOR CARE
Wall Thick. 0.5 mm
Temp. 0°C to +85°C



PTFE HOSE WITH
S. S. BRAIDING
 Smooth Bore PTFE Single / Double
 Braided SS 303 /304
SAE J517-100R14
Temp. - 60°C to + 260°C



PTFE HOSE WITH
S. S. BRAIDING
 Convoluted PTFE
 Single Braided SS 304
SAE J517-100R14
Temp. - 60°C to + 260°C

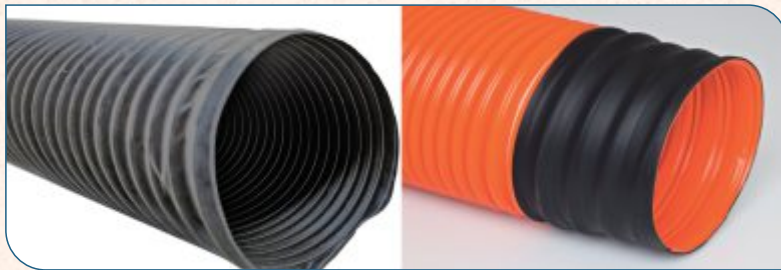

VACUUM LIFT HOSE
BLACK - ORANGE

Range : 100, 120,150,160,180, 200mm
Temp: 85°C



PVC SUCTION & DELIVERY HOSE
GREEN - MEDIUM DUTY
Range : 20 mm to 100 mm
W. P. 3.5kg/cm² to 7kg/cm²
B. P. 11kg/cm² to 24kg/cm²
Temp. 60°C




PP AIR HOSE
Range: 25 to 250 mm
Temp. -20°C to +80°C



FDA-GRADE CHEMICAL
HOSE
UHMWPE
Range : 19 mm to 102 mm ID
W.P. 16 kg/cm²
Temp. -25°C to 100°C
 Steam Cleaning upto +130°C (for Max 30 Minutes)



XLPE CHEMICAL HOSE
SOLVENT HANDLING HOSE
Range : 25 mm to 50 mm ID
W.P. 14 kg/cm²
Temp. -30°C to 90°C
 Steam Cleaning upto +130°C (for Max 30 Minutes)



SUPER STEAM HOSE
DOUBLE WIRE BRAIDED
Range :12.7 mm to 50 mm
W.P. 17 kg/cm²
B.P. 170 kg/cm²
Temp. -40°C to +232°C
IS : 10655 Type 3 & B.S. : 5342 Type 2



EPDM CHEMICAL HOSE
Range :19 mm to 50 mm
W.P. 12 kg/cm²
B.P. 48 kg/cm²
Temp. -30°C to +100°C



**HYDRAULIC HOSES
SAE R1 AT**
Range :6.3 mm to 50.8 mm
W.P. 40 to 230 kg/cm²
B.P. 163 to 920 kg/cm²
Temp. -40°C to +100°C



**HYDRAULIC HOSES
SAE R2 AT**
Range :6.3 mm to 50.8 mm
W.P. 82 to 400 kg/cm²
B.P. 325 to 1630 kg/cm²
Temp. -40°C to +100°C



**THERMOPLASTIC RUBBER HOSE
AIR / PNEUMATIC**
Range :6 mm to 50 mm
W.P. 14 to 22 kg/cm²



**THERMOPLASTIC RUBBER HOSE
WATER - HOSE**
Range :12.5 / 20 / 25 mm
W.P. 10 kg/cm²



**PNEUMATIC TUBE
(PU TUBE)**
W.P. 6 to 10 kg/cm²



**HIGH PRESSURE AIR
CLEANING HOSES**
Range :8.5 mm to 20 mm
W.P. 30 to 60 kg/cm²
B.P. 120 to 225 kg/cm²



M.S. HOSE CLAMP



S.S. HOSE CLAMP



**S.S. / M.S BOLT HEAVY TYPE
& O.H.T.C. HOSE CLAMP**



S.S. BRIDGE CLAMP



Coupling
Screw cuff for different hoses
and diameters.



Screw cuff
Black screw cuff with a standard thread
in different diameters. Other colours on
request.



Standard crimp cuff
Black screw cuff with different threads
and out of various materials. Other
colours on request.



Reducer
For connecting light and middle weight



Hose Connector