

THE ULTIMATE DESTINATION
FOR INDUSTRIAL FLEXIBLE HOSES



FLEXAFLEX HOSES INTERNATIONAL

OUR PROFILE

Flexaflex Hoses International is a trading company, Importing German Flexible Hoses and supplying to various OEMs and actual users of Spinning Mills throughout India and other neighboring countries.

German Hoses for Textile Applications

Carding, Blow room, Bale Plucker, Humidification, Spinning, Ginning, Weaving, Hosiery, Open end Spinning, O.H.T.C , Technical Textiles & finishing (dyeing / printing / Processing), OEMs etc.

PU & PVC STRAIGHT HOSE 2500 mm Length



Pooja Shah - Sales

+91-99784 42215
+91-70690 96458



Chirag Shah - Technical

+91-79903 36570



S.D. Shah - Director

+91-90990 16044



flexaflexhoses@gmail.com



FLEXAFLEX HOSES INTERNATIONAL

106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002

www.flexaflexhoses.com www.hosesmarket.com



PVC FLEXIBLE DUCT HOSE
Grey

Temp. 60°C



PVC FLEXIBLE DUCT HOSE
Transparent

Temp. 60°C



PVC FLEXIBLE DUCT HOSE
Blue

Temp. 60°C



PU HOSE - LIGHT DUTY
Ether Grade

Wall Thick.
0.4 mm

Temp. -40°C to +100°C
(Short-term: +125°C)



PU HOSE - HEAVY DUTY
Ether Grade

Wall Thick.
0.6 / 0.7 / 1 / mm

Temp. -40°C to +100°C
(Short-term: +125°C)



PU HOSE
EXTRA HEAVY DUTY
Ether Grade

Wall Thick.
1.2 mm to 2.5 mm

Temp. -40°C to +100°C
(Short-term: +125°C)



PU HOSE WITH RIGID HELIX
Serie 3PUR S - AL

Wall Thick. 0.75 to 1mm

Temp. -30°C to +80°C



PU HOSE WITH RIGID HELIX
Serie 3PUR M - AL - ANT

Wall Thick. 0.75 to 1mm

Temp. -30°C to +80°C



PP AIR HOSE

Colour: Ivory

Range: 25 to 250 mm

Temp. -20°C to +80°C



PVC STEEL WIRE HOSE
THUNDER HOSE

FOOD GRADE

Wall Thick. 3.5 to 7 mm

Temp. 70°C




SILICON DOUBLE
LAYER HOSE

Open end Spinning Exhaust

Wall Thick. 0.7 / 1 mm

Temp. -70°C to +270°C
(Short time 300°C)



THERMOPLASTIC (TPR)
RUBBER HOSE

Open end Spinning Exhaust

Temp. -40°C to +135°C
(short term up to +150°C)



POLYESTER FABRIC HOSE
PVC COATED


UV RESISTANT - FIRE RETARDANT

GREY - LIGHT

Range: 50 mm to 600 mm

Wall Thick.: 0.25 / 0.3

Temp. -20°C to 70°C

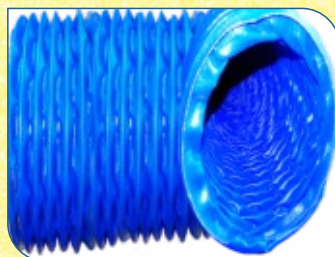

POLYESTER FABRIC HOSE
PVC COATED

UV RESISTANT - FIRE RETARDANT

BLUE - HEAVY

Colour: Blue / Black / Grey / Yellow

Range: 38 mm to 1000 mm

Wall Thick.: 0.4 mm

Temp. -20°C to 70°C



Black Synthetic Hose
- ELGI

Range: 100 / 125 mm

Length : 300 mm



Rixin Blow Hose

Range : 75 / 100 / 125 mm

Length :

1.5 / 2.5 / 2.8 / 3 mtrs



**PVC BRAIDED HOSES
TRANSPARENT (HEAVY DUTY)**
Wall Thick. 2.5 to 8 mm
Range : 6 mm to 76 mm
W. P. 6kg/cm² to 25kg/cm²
Temp. 70° C



**THERMOPLASTIC RUBBER HOSE
AIR / PNEUMATIC**
Range :6 mm to 50 mm
W.P. 14 to 22 kg/cm²



**PNEUMATIC TUBE
PU TUBE & FITTINGS**
W.P. 6 to 10 kg/cm²



**HIGH PRESSURE AIR
CLEANING HOSES**
Range :8.5 mm to 20 mm
W.P. 30 to 60 kg/cm²
B.P. 120 to 225 kg/cm²



**HYDRAULIC HOSES
SAE R1 AT**
Range :6.3 mm to 50.8 mm
W.P. 40 to 230 kg/cm²
B.P. 163 to 920 kg/cm²
Temp. -40°C to +100°C



**HYDRAULIC HOSES
SAE R2 AT**
Range :6.3 mm to 50.8 mm
W.P. 82 to 400 kg/cm²
B.P. 325 to 1630 kg/cm²
Temp. -40°C to +100°C



**EVA PROFILE HOSE
INDUSTRIAL VACUUM
CLEANER HOSE
SWIMMING POOL HOSE**
Temp. -50°C up to +60°C




**VAT-ELASTIC HOSE
VACUUM CLEANER HOSE**
WET AND DRY FLOOR CARE
Wall Thick. 0.5 mm
Temp. 0°C up to +85°C



**PVC SUCTION & DELIVERY HOSE
HEAVY DUTY GREY**
Range : 40 mm to 300 mm
W. P. 2.5kg/cm² to 8kg/cm²
B. P. 6kg/cm² to 25kg/cm²
Temp. 60°C



**PVC SUCTION & DELIVERY HOSE
GREEN - MEDIUM DUTY**
Range : 200 mm to 100 mm
W. P. 3.5kg/cm² to 7kg/cm²
B. P. 11kg/cm² to 24kg/cm²
Temp. 60°C

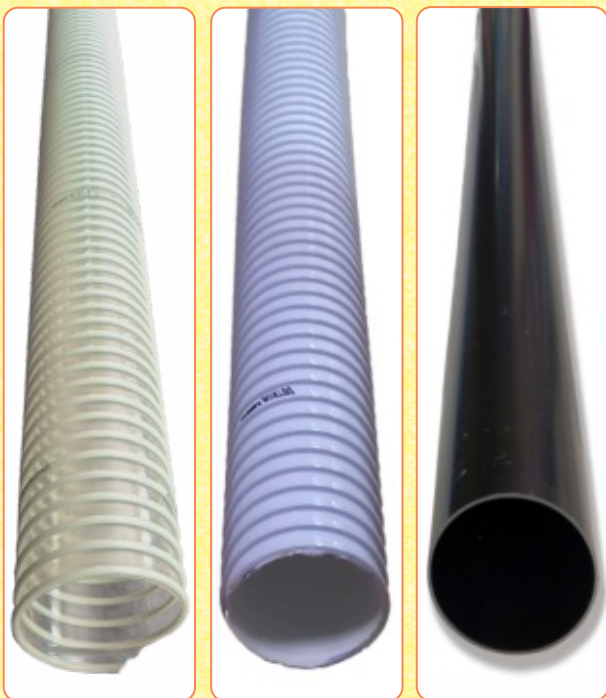

**PU & PVC STRAIGHT HOSE
2500 mm Length**



M.S. HOSE CLAMP



S.S. HOSE CLAMP



**S.S. / M.S BOLT HEAVY TYPE
& O.H.T.C. HOSE CLAMP**



S.S. BRIDGE CLAMP



Coupling
Screw cuff for different hoses
and diameters.



Standard crip cuff
Black screw cuff with different threads
and out of various materials. Other
colours on request.



Reducer
For connecting light and middle weight



Hose Connector