


**THE ULTIMATE DESTINATION
FOR INDUSTRIAL FLEXIBLE HOSES**

flexAflex

FLEXAFLEX HOSES INTERNATIONAL

HOSES FOR CERAMIC INDUSTRIES

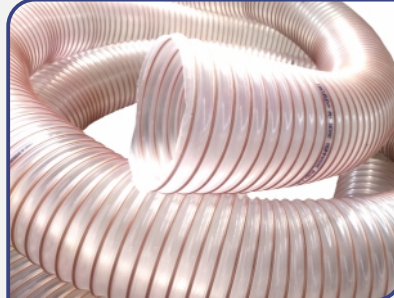

Contact



Pooja Shah - Sales
+91-99784 42215
+91-70690 96458



Chirag Shah - Technical
+91-79903 36570



S.D. Shah - Director
+91-90990 16044



flexaflexhoses@gmail.com



www.flexaflexhoses.com
www.hosesmarket.com



FLEXAFLEX HOSES INTERNATIONAL

106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002





**SILICONE DUCT HOSE
DOUBLE LAYER**

Wall Thick. 0.8mm / 1 mm

Temp. -70°C to +300°C




**SILICONE DUCT HOSE
HOT PET CONVEYANCE**

HOT PET GRANULES

Wall Thick 5 mm

Temp. -60°C to +200°C

HOT SOLID CONVEYING



**PU HOSE - LIGHT DUTY
Ether Grade**

Wall Thick. 0.4 mm

Temp. -40°C to +100°C
(Short-term: +125°C)



**PU HOSE - HEAVY DUTY
Ether Grade
FOOD GRADE**

Wall Thick.
0.6/ 0.8/0.9/1/1.2 mm

Temp. -40°C to +100°C
(Short-term: +125°C)



**PU HOSE - HEAVY DUTY
Ether Grade**

NON TOXIC

Wall Thick.

0.7/ 1 / 1.4/1.5 mm

Temp. -40°C to +100°C
(Short-term: +125°C)



**PU HOSE - EXTRA HEAVY DUTY
Ether Grade**

FOOD GRADE / NON TOXIC

Auto Loader Hose

Wall Thick. 2.5 mm

Temp. -40°C to +100°C
(Short-term: +125°C)

Sand Conveying




**PVC STEEL WIRE HOSE
THUNDER HOSE**

FOOD GRADE

Auto Loader Hose

Wall Thick. 3.5 to 7 mm

Temp. 70°C



**VACUUM LIFT HOSE
GERMAN**

Wall Thick. 0.7 - 1.2 mm

Range : 80 to 305 mm

Temp: -35°C to 135°C

Colour: Black & Dark Blue




**PVC SUCTION & DELIVERY HOSE
GREEN - MEDIUM DUTY**

Range : 20 mm to 100 mm

W. P. 3.5kg/cm² to 7kg/cm²

B. P. 11kg/cm² to 24kg/cm²

Temp. 60°C



**PVC SUCTION & DELIVERY HOSE
HEAVY DUTY GREY**

Range : 25 mm to 300 mm

W. P. 2.5kg/cm² to 8kg/cm²

B. P. 6kg/cm² to 25kg/cm²

Temp. 60°C



**HIGH PRESSURE SUCTION
& DELIVERY HOSE**

Range : 51 mm to 203 mm

W. P. 3kg/cm² to 5kg/cm²

Temp. 65°C



**PVC BRAIDED HOSES
TRANSPARENT (HEAVY DUTY)**

Wall Thick. 2.5 to 8 mm

Range : 6 mm to 76 mm

W. P. 6kg/cm² to 25kg/cm²

Temp. 70°C



**HVAC - Ventilation Hose
Yellow Fabric Hose**

UV / Flame Resistant

Wall Thick. 0.5 mm

Temp. -20°C to +70°C



**HIGH TEMPERATURE
CLIP HOSE - HT - 450**

Range: 50 mm to 300 mm

Wall Thick.: 0.45 mm

Temp. - 20°C to + 450°C



FLEXIBLE METAL HOSES
S.S. CORRUGATED
FLEXIBLE HOSES
 Stainless steel
 AISI 304, AISI 321 and AISI316L
Temp. -270°C to +600°C
EN ISO 10380



HYDRAULIC HOSES
SAE R1 AT
 Range :6.3 mm to 50.8 mm
W.P. 40 to 230 kg/cm²
B.P. 163 to 920 kg/cm²
 Temp. -40°C to +100°C



HYDRAULIC HOSES
SAE R2 AT
 Range :6.3 mm to 50.8 mm
W.P. 82 to 400 kg/cm²
B.P. 325 to 1630 kg/cm²
 Temp. -40°C to +100°C



THERMOPLASTIC RUBBER HOSE
WATER - HOSE
 Range :12.5 / 20 / 25 mm
W.P. 10 kg/cm²



THERMOPLASTIC RUBBER HOSE
AIR / PNEUMATIC
 Range :6 mm to 50 mm
W.P. 14 to 22 kg/cm²



PNEUMATIC TUBE
(PU TUBE)
W.P. 6 to 10 kg/cm²



HIGH PRESSURE AIR
CLEANING HOSES
 Range :8.5 mm to 20 mm
W.P. 30 to 60 kg/cm²
B.P. 120 to 225 kg/cm²



S.S. 304 GRADE
BRIDGE CLAMP
LHS & RHS



S.S. / M.S BOLT HEAVY TYPE & O.H.T.C. HOSE CLAMP



M.S. & S.S HOSE CLAMP



Hose Connector



Coupling
 Screw cuff for different hoses and diameters.



Screw cuff

