



FLEXAFLEX HOSES INTERNATIONAL  
Ahmedabad



**Pooja Shah - Sales**  
+91-99784 42215 | +91-70690 96458




**Chirag Shah - Technical**  
+91-79903 36570



**S.D. Shah - Director**  
+91-90990 16044

## HIGH TEMPERATURE CLIP PTFE

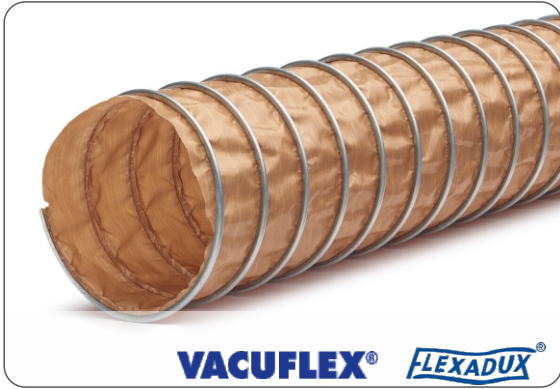

### Structure:

Light weight and very flexible PTFE ducting  
PTFE coated glass fabric, brown

### Temperature range:

-150°C up to 250°C

### Standard Length:

3 / 6 Meter

### Properties:

Good temperature and chemical resistance, outer wear strip, good compressibility

### Special construction:

PTFE<sup>®</sup> EL CL – conductive (R < 10<sup>6</sup> Ohm), conform to TRBS 2153 and ATEX guideline 94/9/EC, black

### Applications:

Suction of aggressive chemical fumes and gases in all fields of industry

ID mm	OD mm	Wall Thick. mm	Bending Radius mm	Pressure bar	Vacuum bar
50	60.00	0.12	30	0.85	0.32
60	70.00	0.12	36	0.68	0.22
76	86.00	0.12	45	0.47	0.14
80	90.00	0.12	48	0.43	0.12
102	112.00	0.12	60	0.30	0.08
112	122.00	0.12	66	0.25	0.07
120	130.00	0.12	72	0.22	0.06
127	137.00	0.12	75	0.21	0.05
140	150.00	0.12	83	0.25	0.04
152	162.00	0.12	90	0.16	0.04
160	170.00	0.12	96	0.14	0.03
180	190.00	0.12	108	0.12	0.02
203	213.00	0.12	120	0.10	0.02
228	238.00	0.12	135	0.12	0.01
254	264.00	0.12	175	0.07	0.01
305	315.00	0.12	210	0.05	0.01
356	366.00	0.12	245	0.04	0.01
407	417.00	0.12	280	0.03	0.01
457	467.00	0.12	360	0.04	0.01
508	518.00	0.12	400	0.04	0.01



flexaflexhoses@gmail.com



www.flexaflexhoses.com  
www.hosesmarket.com



FLEXAFLEX HOSES INTERNATIONAL  
106, First Floor, Kailashpathi Chamber,  
Nr. Sunrise Restaurant, Reid Road,  
O/S Panchkuva Gate, Ahmedabad - 380 002