



FLEXAFLEX HOSES INTERNATIONAL
Ahmedabad



Pooja Shah - Sales
+91-99784 42215 | +91-70690 96458




Chirag Shah - Technical
+91-79903 36570



S.D. Shah - Director
+91-90990 16044

PU SUCTION HOSE

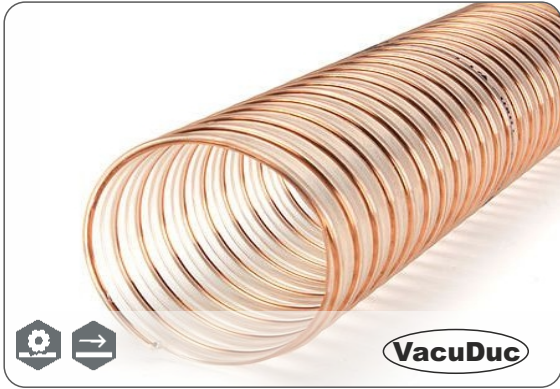

Structure:

Special Premium ester - Polyurethane with spring steel reinforcement.

Wall Thickness. 1.5 mm

Temperature range:

-40°C up to +90°C
Short Term +125°C

Colour:

Transparent

Properties:

- Highly abrasion -proof
- Smooth interior
- Increased pressure and vacuum resistance
- High tensile strength and tear resistant
- Good resistance to chemicals

- Small bending radius
 - Gas and liquid tight
 - Capable of electrostatic discharge by grounding the spiral
- Electrical and surface resistance $\leq 10^{10} \Omega$

Applications:

High flow - rates of hot and abrasive solids such as powder, chip and granules, Industrial vacuum cleaners, Granule conveying systems, Printing machines, Blowers and Compressors, as robust protection hose. Ideal for auto loader suction.

ID mm	OD mm	Wall Thick. mm	Pressure bar	Vacuum bar	Standard Length meter
32	40	1.5	3.095	0.875	15
38	46	1.5	3.925	0.865	15
51	59	1.5	2.330	0.835	15
60	68	1.5	1.955	0.730	15
63	71	1.5	1.815	0.675	15
76	85	1.5	1.575	0.555	15
90	99	1.5	1.300	0.425	15
102	111	1.5	1.190	0.355	15
114	123	1.5	1.090	0.335	15
120	129	1.5	1.050	0.315	15
127	136	1.5	0.960	0.265	15
140	149	1.5	0.900	0.240	15
152	161	1.5	0.800	0.180	15
178	187	1.5	0.705	0.150	15
203	212	1.5	0.600	0.120	15



flexaflexhoses@gmail.com



www.flexaflexhoses.com
www.hosesmarket.com



FLEXAFLEX HOSES INTERNATIONAL
106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002