



FLEXAFLEX HOSES INTERNATIONAL
Ahmedabad



Pooja Shah - Sales
+91-99784 42215 | +91-70690 96458




Chirag Shah - Technical
+91-79903 36570



S.D. Shah - Director
+91-90990 16044

PU SUCTION HOSE

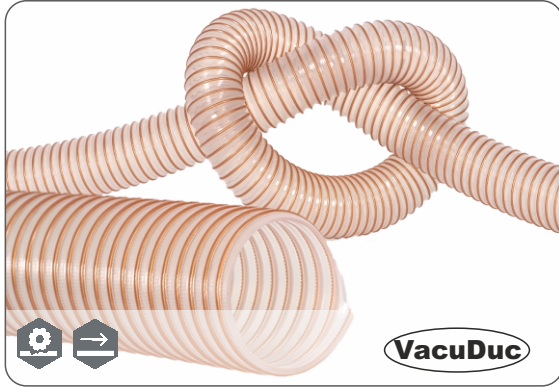

Structure:

Special Premium ester - Polyurethane. with spring steel reinforcement.

Wall Thickness: 2.0 - 2.5 mm App.

Temperature range:

-40°C up to +90°C
Short Term +125°C

Colour:

Transparent

Applications:

- High flow -rates of hot and abrasive solids such as powder, chip and granules. Ideal for auto loader suction .
- Industrial vacuum cleaners, granule conveying systems, printing machines, blowers and compressors
- As robust protection hose

ID mm	OD mm	Pressure bar	Vacuum bar	Bending Radius mm
38	48.0	3.94	0.90	180.0
51	62.0	3.29	0.90	220.0
63	74.0	2.62	0.90	270.0
76	88.0	2.29	0.90	310.0
102	114.0	1.69	0.90	450.0



flexaflexhoses@gmail.com



www.flexaflexhoses.com
www.hosesmarket.com



FLEXAFLEX HOSES INTERNATIONAL
106, First Floor, Kailashpathi Chamber,
Nr. Sunrise Restaurant, Reid Road,
O/S Panchkuva Gate, Ahmedabad - 380 002