



FLEXAFLEX HOSES INTERNATIONAL  
Ahmedabad



**Pooja Shah - Sales**  
+91-99784 42215 | +91-70690 96458




**Chirag Shah - Technical**  
+91-79903 36570



**S.D. Shah - Director**  
+91-90990 16044

## PVC Steel Wire Hose with Fiber Reinforcement

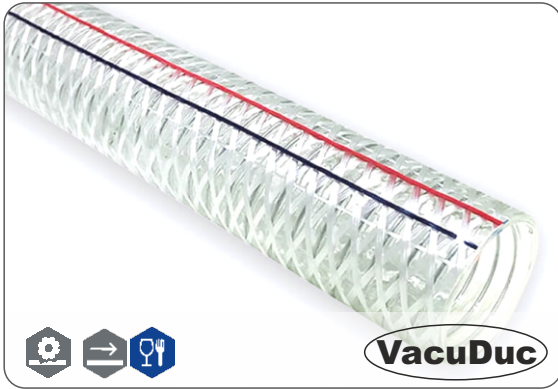

### Structure:

Reinforced with both steel wire and fiber, which make the hose perform better under conditions of positive and negative pressure,

Suction and transport hose, inside outside smooth, tough and flexible, vacuum and compression resistance and with high axial strength.

### Temperature range:

65°C

### Temperature range:

Transparent

### Applications:

Reinforced with both steel wire and fiber, which make the hose perform better under conditions of positive and negative pressure, mainly suitable for suction and discharge of water, slurries, granules, powder, chemical in shipyards, agricultural and industrial applications. **Widely used in water suction and delivery in printing machines.**

ID mm	OD mm	W. Pressure bar	B.Pressure bar	Standard Length meter
25	33	8	24	50
32	41	6	18	50
38	48	6	18	50
50	62	6	18	50
64	78	5	15	30
76	90	5	15	30
90	106	5	15	20
102	118	5	15	20



flexaflexhoses@gmail.com



www.flexaflexhoses.com  
www.hosesmarket.com



FLEXAFLEX HOSES INTERNATIONAL  
106, First Floor, Kailashpathi Chamber,  
Nr. Sunrise Restaurant, Reid Road,  
O/S Panchkuva Gate, Ahmedabad - 380 002