

flexAflex

FLEXAFLEX HOSES INTERNATIONAL
Ahmedabad


+91-99784 42215
+91-70690 96458

flexaflexhoses@gmail.com


www.flexaflexhoses.com
www.hosesmarket.com

Products


Auto Loader - Material Conveying - PU/PVC Suction Hoses




PU HOSE - EXTRA HEAVY DUTY
Ether Grade
Wall Thickness: 2.5 mm
Temp: 100°C



PU SUCTION HOSE
Wall Thickness: 2.2 to 2.5 mm
Temp: 100°C

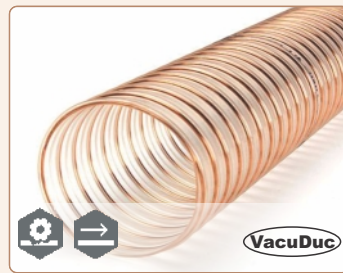

PU SUCTION HOSE
Wall Thickness: 1.5 mm
Temp: 100°C

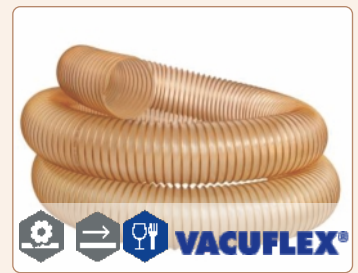


PU HOSE - EXTRA HEAVY DUTY
Ether Grade
Wall Thickness: 1.4 mm
Temp: 100°C



PU SUCTION HOSE
Wall Thickness: 0.9 mm
Temp: 100°C




PVC STEEL WIRE - THUNDER HOSE
Range: 12 to 203 mm
Temp: 70°C

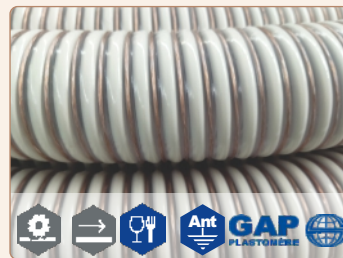

PVC Vacuum Hose - FLEX ANT
Wall Thickness: 3.5 to 6.5 mm
Range: 32 to 120 mm
Temp: 60°C



PVC Transparent - Non Toxic Hose
"Dutron ANT Copper"
Range: 40 to 100 mm
Temp: 60°C

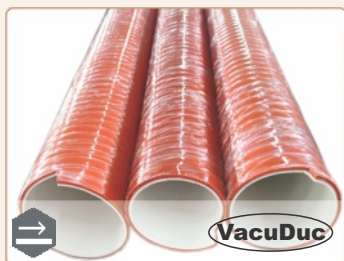

Silicone Duct Hose
HOT PET CONVEYANCE
Wall Thickness: 5 mm
Temp: 200°C



High Temp. PU Hose (HT-PU)
Wall Thickness: 0.7 / 1.4 mm
Temp: 145°C



PU Hose - SMARTFLEX
Wall Thickness: 0.7 to 2 mm
Temp: 100°C




PU Hose - PAS FOOD
(S.S. 304)
Wall Thickness: 0.7 / 1.4 mm
Temp: 100°C

Auto Loader - Material Conveying - PU/PVC Suction Hoses



PVC Steel Wire Hose with Fiber Reinforcement
Range: 25 to 102 mm
Temp: 65°C




PVC Fiber Reinforced Suction Hose
Range : 40 to 200 mm
Temp: 65°C




STRIPWOUND INTERLOCK HOSE (EXHAUST & CONVEYING HOSE)
Range: 20 to 300 mm
Temp: 750°C


Powder Conveying - High Vacuum Air



PU Hose With Rigid Plastic Helix
Wall Thickness: 0.5 to 1.1 mm
Temp: 80°C



PU Hose With Rigid Plastic Helix (ANT Copper Wire)
Wall Thickness: 0.5 to 1.1 mm
Temp: 80°C

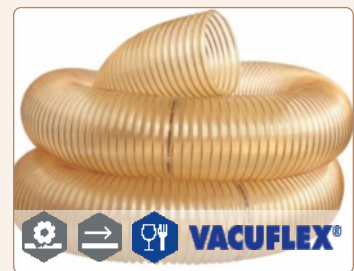

PU Hose Heavy Duty (K1Z)
Wall Thickness: 0.6/1/1.2
Temp: 100°C

★ Any hose from auto loader suction may also be used for abrasive powder conveying.

Dust Collection - Floor Cleaning - Air Conveying




PU Hose Light Duty
Wall Thickness: 0.4 /0.6 mm
Temp: 100°C



PVC Duct Hose
Grey, Blue, Transparent
Temp: 60°C




EVA Vacuum Cleaner Hose
Range: 25 to 80 mm
Temp: 60°C

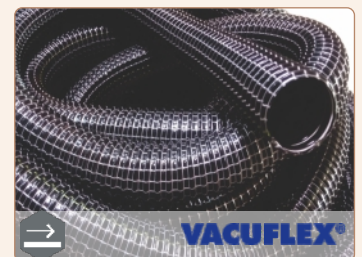


VAT ELASTIC HOSE Vacuum Cleaner
Range: 25 to 160 mm
Temp: 85°C

★ PU Hose Light duty: Compressed Rolls.

High Temperature Hoses - Material Dryers, Flexographic, Rotogravure, UV, Laser, Offset Printing Machines, Corona Treatment, Lamination & Coating, Exhaust Flue Gases and Fumes.

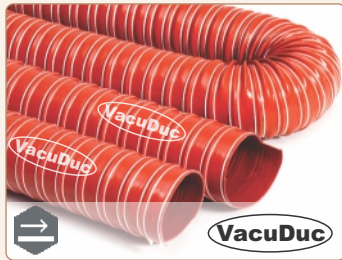

Silicone Duct Hose Double Layer
Wall Thickness: 0.8 mm
Temp: 300°C

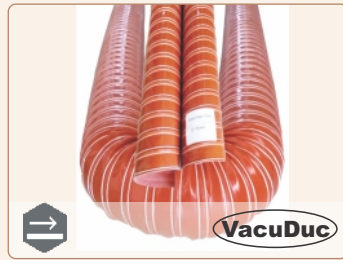

Silicone Duct Hose Double Layer
Wall Thickness: 1 mm
Temp: 300°C



TPR - Thermoplastic Rubber Duct Hose
Wall Thickness: 0.65 mm
Temp: 135°C



PU Hose
Wall Thickness: 0.4/0.6/1.2 mm
Temp: 100°C



Polyester Fabric Hose PVC Coated
Wall Thickness: 0.35 / 0.40 mm
Temp: 70°C



TPV Hose
Range: 32 to 630 mm
Temp: 130°C



High Temperature (HT 450) Glass Fabric Clip Hose
Wall Thickness: 0.45 mm
Temp: 450°C




High Temperature Clip PTFE - German
Wall Thickness: 0.12 mm
Temp: -150°C to 250°C



High Temperature Clip 450 - German
Wall Thickness: 0.75 mm
Temp: -60°C to 450°C



High Temperature Clip 1100 - German
Wall Thickness: 4 mm
Temp: -60°C to 1100°C

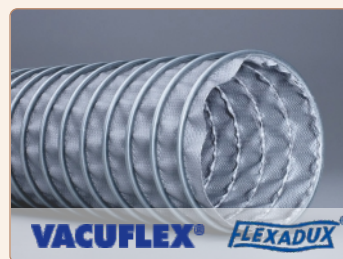

High Temperature Clip Silicon - German
Wall Thickness: 0.4 mm
Temp: -60°C to 300°C



Aluminium Foil Hose
Range: 76 to 508 mm
Temp: -26°C to 150°C



Aluminium Combi Hose
Range: 52 to 203 mm
Temp: -30°C to 150°C



PP AIR Hose
Range: 25 to 250 mm
Temp: -20°C to +80°C



ALUMINIUM SEMI RIGID AIR DUCT
Range: 50mm to 800mm
Temp: -30°C to +150°C

Ventilation and AC Ducting




YELLOW VENTILATION AIR DUCT HOSE
PVC Coated Polyester Fabric Hose
Wall Thickness: 0.5 mm
Temp: -20°C to 70°C



Polyester Fabric Hose
PVC Coated
Wall Thickness: 0.35 / 0.40 mm
Temp: 70°C



PP AIR Hose
Range: 25 to 250 mm
Temp: -20°C to +80°C

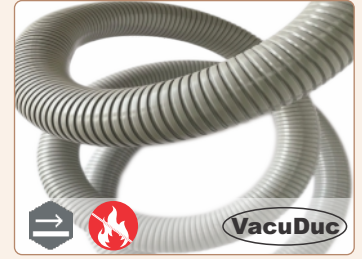

PVC Rigid Self Supporting Hoses
Range: 51 to 200 mm
Temp: -10°C to 60°C

Industrial Rubber Hoses



S. S. Corrugated Hoses
&
PTFE Hose with S.S. Braiding
Temp. -270°C to +700°C



Hydraulic Hoses R1 & R2
Range :6.3 mm to 50.8 mm
Temp: -40°C to +100°C



Steam Hose Single wire
Range : 20 mm to 50 mm
Temp: -40°C to +195°C



SUPER STEAM HOSE
DOUBLE WIRE BRAIDED
Range : 12.7 mm to 50 mm
Temp: -40°C to +232°C



XLPE Chemical Hose
Solvent Handling Hose
Range: 25 to 50 mm
Temp: -30°C to 90°C



UHMWPE
FDA-Grade Chemical Hose
Range: 19 to 102 mm
Temp: -25°C to 130°C



Carbon Free Hose
NON - Conductive Hose
Range: 10 to 100 mm
Temp: -40°C to +100°C



Sand Blast Hose
Shot Blast Hose
Range: 12.5 to 100 mm
Temp: -40°C to +70°C



Cement Grouting Hose
Concrete Transfer Hose
Range: 25 to 100 mm
Temp: -40°C to +70°C



Air and Water Hose
Range: 12.5 to 100 mm
Temp: -30°C to +82°C



Pneumatic Tool Hose
Range: 6.3 to 50 mm
Temp: -30°C to +82°C



Composite Hose
Chemical / Oil / Fuel / Aviation Fuel /
Tanker / Dock - Hoses
Range: 25 to 250 mm
Temp: -30°C to 80°C